


**optibelt RF** Gummigewebetreibriemen Type B 50 (keine Lagerware)  
**Rubber Covered Flat Belting Type B 50 (Non Stock Items)**

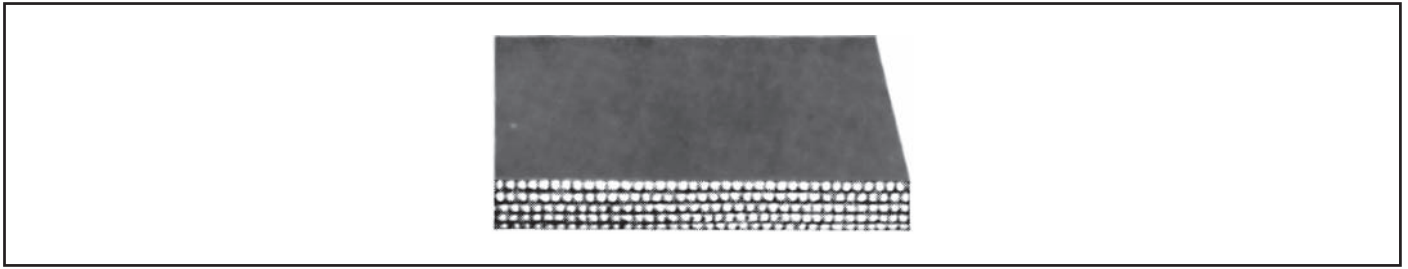

Breite <i>Width</i> (mm)	20; 25; 30; 35; 40; 50; 60; 70; 80; 90; 100; 110; 115; 120; 130; 140; 150; 160; 170; 180; 190; 200; 220; 230; 240; 250; 280; 300; 400; 500; 1000		
	Dicke <i>Thickness</i> = (mm)	Gewicht <i>Weight</i> = (kg/m <sup>2</sup> )	Min.-Scheibendurchmesser <i>Min. pulley diameter</i> (mm)
3 Lagen <i>plies</i>	3,6	3,8	89
4 Lagen <i>plies</i>	4,8	5,1	120
5 Lagen <i>plies</i>	6,0	6,4	160


Weitere Breiten und Endlosverbindungen auf Anfrage.  
 Rollenlänge: 50 m

*Further widths and endless connectors on request.  
 Length of roll: 50 metres*

Mindestlänge für Endlos-Vulkanisation: 1450 mm  
 Verkleben und Hakenverbindung für kürzere Längen möglich.

*Minimum length for vulcanising endless: 1450 mm  
 Shorter lengths are possible using adhesives or fasteners.*

**optibelt CF** Seilcordflachriemen (keine Lagerware)  
**Cable Cord Flat Belting (Non Stock Items)**

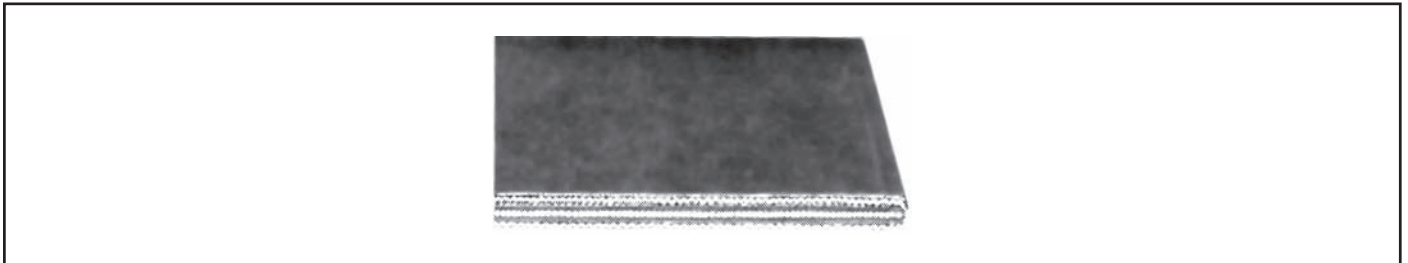

Breite <i>Width</i> (mm)	Gewicht <i>Weight</i> = (kg/m)
60	0,36
70	0,42
80	0,48
90	0,54
100	0,60
110	0,66
120	0,72
130	0,78
140	0,84
150	0,90
160	0,96
170	1,02

Minimale Breite: 30 mm Max. Breite: 550 mm Minimale Länge: 1000 mm Max. Länge: 23000 mm Mindest-Abnahmemenge: 2 Stück	<i>Minimum width: 30 mm          Max. width: 550 mm          Minimum length: 1000 mm          Max. length: 23000 mm          Minimum order quantity: 2 pieces</i>
---	---